


BARREL SPEARS

GAS OPERATED BARREL SPEAR

- Positive barrel locking device seals inside the bung hole. No dangerous straps.
- Butterfly valve and short sight glass with polycarbonate lens is included as standard.
- The gas inlet and exhaust is incorporated into the locking device that sits on top of the barrel giving infinite height adjustment and making the spear less top heavy.
- A regulator with gauge on the gas inlet to limit the pressure to 100kPa (14.5 P.S.I.) so barrels won't blow.
- Gas exits from directly under the expandable bung into the head space of the barrel eliminating bubbling.
- Foot spike for lees adjustment – with side ports for minimal lees disturbance.
- Your choice of fitting in male or female up to 2" included. BSM, RJT, DIN, SMS, Triclover and Wine-Thread.
- All components available as user friendly spare parts.
- OPTIONAL: Safety Pressure Relief Valve. This will open @ 117kPa (17 P.S.I.) should the regulator fail.

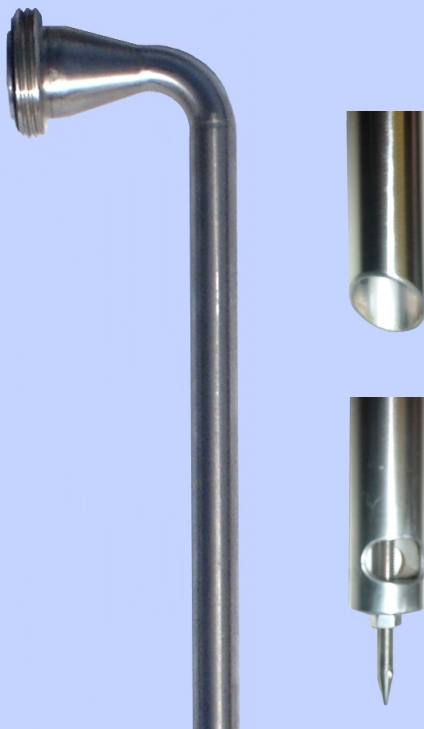

STANDARD and SPIKED BARREL SPEARS

- Standard spear has a 45° angled base for filling and/or decanting.
- Spike for height adjustment – with side ports entry for racking on lees.
- Your choice of fitting in male or female up to 2" included. BSM, RJT, DIN, SMS, Triclover and Wine-Thread.
- Spear will fit into a 205 litre (44 gallon) drum.

Options:

- Sight glass – standard or short.
- Butterfly Valve.
- Ball Valve.
- Customer specific spears.



W E Ware & Co Pty Ltd

For enquiries, please contact Vitis & Winemakers;

NZ Office & Shop:

24-26 Herbert St, Mayfield, Blenheim.

New Zealand

Phone: +64 3 577-8778

info@vitiswinemakers.com

Head Office:

96 Chifley Drive, Preston. VIC.

Australia

Phone: +61 (03) 9487-1160

www.vitiswinemakers.com